

DST600 60W Max-Type-C with PD

Product Highlights:


- FR4 PCB
- AI workshop
- 100% ATE test
- High Reliability
- Built-in OVP, OCP and SCP
- 100% smart burn-in test for 4 hours
- ROHS, REACH, PAHS compliant



Safety Approvals

ETL, FCC, GS, CE, SAA, C-TICK, RCM, PSE, CCC

Dimension

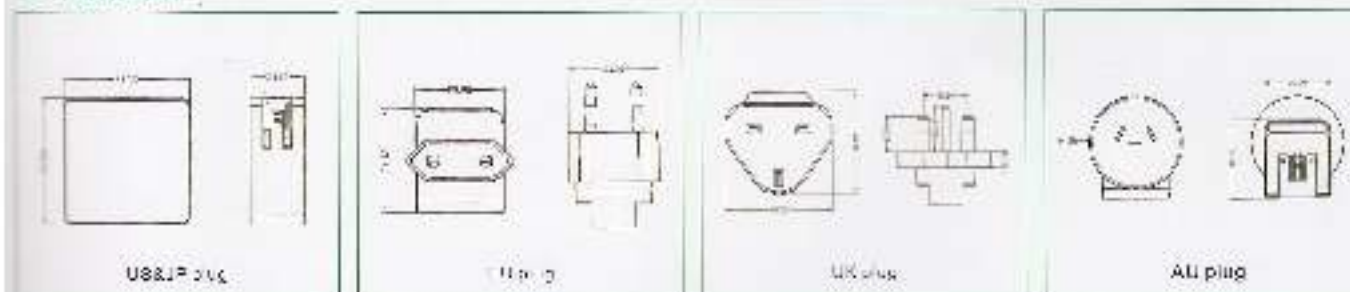

SPECIFICATIONS

| | | |
|--------------------------|---|--------------------------------------|
| Input | Input range | 100-240V AC(Full Range),50/60Hz |
| | Input current(A) | 1.5A@90VAC 0.3A@264VAC MAX |
| Output | Voltage range | DC 0-20V output |
| | Voltage regulation | ±1.5% at constant voltage mode |
| | Current range | 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3A |
| | Max power(W) | 60W Max |
| Energy Saving | CEC, VRCAN DOP, ERP, GEMS Efficiency Level VI | |
| Environmental protection | ROHS, REACH, PAHS | |
| Environmental | Operation temperature | 0°C to +45°C ambient |
| | Storage temperature | -20°C to +80°C |
| | Operating Humidity | 10%~90% (non-condensing) |
| | Relative Humidity | 5%~95% (non-condensing) |
| | MTBF >25,000 hours at 80% load and 25°C ambient temperature | |