



Via L.da Vinci, 47 -20030 Senago (MI)
Tel.029989684 info@larsonnuova.it
www.larsonnuova.com

SPECIFICATION FOR APPROVAL

CUSTOMER/客户 : 01061
ARTICLE/品名: SWITCHING MODE POWER SUPPLY
SPECIFICATION /规格: UL/GS/CE/SAA Desktop/桌上式
MODEL NO/产品型号.: 902-360250W
OUR PART NO./产品编号: 902-360250-19B15A
CUSTOMER P. N/客户料号:
INPUT/输入 : 100-240V AC 50/60Hz
OUTPUT/输出: 36.0V DC 2.5A
INPUT/输入 : 100-240V AC 50/60Hz

1.Compendium/简述

The document details the electrical, mechanical and environmental specifications of a SMPS, the power supply provides 90 W continuous output power.
资料详细描述了一款 90 W(连续输出功率)开关电源的电气性，结构性及环境等要求。
The power supply shall meet the RoHS requirements.
此款电源符合 RoHS 要求.

1.1 Description/描述

- ☐ SMPS Adapter(Wall mount)/插墙式适配器
- ☒ SMPS Adapter(Desk-top)/桌面型适配器
- ☐ SMPS Unit (With Case)/带铁壳型
- ☐ SMPS Adapter(Interchangeable)/可换头适配器
- ☐ Open Frame/开放式结构
- ☐ Others/其他

2. Input Characteristics/输入特性

2.1 Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 264Vac with a single phase.
输入电压范围：从 90Vac 到 264Vac，单相输入.

	Minimum/最小	Nominal/额定值	Maximum/最大
Input Voltage/输入电压	90Vac	100Vac~240Vac	264Vac
Input Frequency/输入频率	47Hz	60Hz/50Hz	63Hz

2.2 Input AC Current/AC 输入电流

1.5Amax @ 100-240Vac input & Full load/在 100 – 240 Vac 输入和满载条件下最大 1.5A 有效值

2.3 Inrush Current (cold start)/浪涌电流(冷启动)

The inrush current will not exceed 80A at 100-240Vac input and Max load for a cold start at 25℃
在 100-240V 交流电输入和最大负载冷启动环境 25℃时浪通电流不能超过 80A

2.4 Average Efficiency/平均效率

While input 115Vac and 230Vac, the average efficiency is more than 88.0%.
The test point is at 25%, 50%, 75% and 100% of max load respectively.
在输入 115Vac 和 230Vac 条件下，平均效率不小于 88.0%。
测试点分别是最大载的 25%,50%,75%和 100%。

2.5 Energy Consumption /空载功耗

While input 115Vac or 230Vac and the output is no load,the input power loss must be less than 0.21W

在输入 115Vac/230Vac 时,空载功耗小于 0.21W

3. Output Characteristics/输出特性

3.1 Static Output Characteristics <Vo & R+N>/静态输出特性<输出&纹波+噪音>

Output	Rated Load/额定负载			Output Range	R+N	Remark
Rate	Min. Load	Max. Load		输出电压范围	纹波与噪声	备注
+36.0V	0.0A	2.5A		34.2V-37.8V	200mVp-p	

Ripple & Noise: Measurement is done by 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 10uF electrolysis capacitor.

(test under the condition of rated input and rated output)

纹波与噪声: 量测时示波器选用 20MHz 带宽限制,输出端要并联一颗 0.1uF 的陶瓷电容和一颗 10uF 的电 解电容。(在额定输入及输出的条件下检测)

3.2 Line/ Load Regulation/线性/负载调整率

Output	Load Condition/负载条件		Line Regulation	Load Regulation	Remark
Rate	Min. Load	Max. Load	线性调整率	负载调整率	备注
+36V	0.0A	2.5A	± 3%	± 5%	

3.3 Turn - on Delay Time/开机延迟时间

3S max. @ 100 Vac to 240 Vac input & Full load

在 100Vac 到 240Vac 输入和满载条件下最大 3S

3.4 Hold-up Time/关机维持时间

5mS min. @ Full load & 100Vac/60Hz input turn off at worst case

在 100Vac 输入,满载同时最差情况下关机, 最小 5mS

3.5 Capacitance Load/容性负载

While input 100~240Vac and capacitance load is 470uF, the adapter can turn on normally and the output is in the rated range.

在输入 100~240Vac, 470uF 容性负载条件下, 适配器能正常开机。

并且输出电压范围在额定范围下。

3.6 Output Overshoot / Undershoot/输出过冲/欠冲

10% max. When the power on or off

当电源开/关机时, 10%最大

3.7 Output Load Transient Response/输出负载瞬态响应

the output shall not exceed 10% of the nominal output voltage, load fluctuation: from 20% to

80%, R/S: 0.5A/uS, frequency: 100Hz duration and 8mS at 80%.

输出电压不能超过额定电压的 10%,负载变化: 从 20%到 80%, 斜率: 0.5A/uS, 频率: 100Hz, 80%负载持续时间为 8mS.

4. Protection Requirements/保护要求

4.1 Over Current Protection/过流保护

Over Current Point Limited/过流点限制: $I > 3.25A$

The output shall hiccup when the over currents applied to the output rail, and shall be self-recovery when the fault condition is removed

当过电流时, 输出将进入打嗝模式, 当过流情况解除后, 产品将会自动恢复正常

4.2 Short Circuit Protection/短路保护

The input power shall decrease when the output rail short, the power supply shall no damage, and shall be self-recovery when the fault condition is removed

当输出短路时,产品输入功率降低且不会损伤,当短路情况解除后,产品将会自动恢复正常

4.3 Over Voltage Protection/过压保护

The power supply shall protection when the output over voltage.

当输出发生过压时, 产品进入保护模式.

5. Environment Requirements/环境要求

5.1 Operating Temperature and Relative Humidity/操作温/湿度要求

0°C to +40°C

10%RH to 90%RH

5.2 Storage Temperature and Relative Humidity/存储温/湿度要求

-20°C to +80°C

5%RH to 95%RH non-condensing @ Sea level shall be low 10,000 feet/低于 10,000 英尺

5.3 Vibration/振动

10 to 300Hz sweep at a constant acceleration of 1.0G(Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z

扫描频率: 10 to 300Hz, 加速度: 1.0G(位移: 3.5mm), X, Y, Z 三垂直坐标轴向各振动 1 小时

6. Reliability Requirements/可靠性要求

6.1 Burn-in/煲机

The power supply shall be burn-in at least 4 Hours under normal input and

80% rated load at 40°C $\pm$ 5°C

产品至少要在 40°C $\pm$ 5°C 的环境及 80%以上额定负载条件下煲机 4 小时

6.2 MTBF Qualification/平均间隔故障时间估算

The MTBF shall be at least 50,000hours at 25°C, Full load and nominal input condition

平均间隔故障时间: 至少 50,000 小时,25°C 环境及额定输入与满载条件下

7. EMI/EMS Standards/EMI/EMS 标准

7.1 EMI Standards/EMI 标准

☒ FCC Part15 class B

☒ EN55032

☐ EN55014-1

☐ EN61204-3 (CISPR 22)

☐ AS/NZS CISPR22

☐ AS/NZS CISPR13

☐ AS/NZS CISPR14. 1

☐ GB9254

☐ GB13837

☐ GB17625. 1

☐ J55032

☐ J55013

☐ J55014-1

☐ KN22

☐ KN13

☐ KN14-1

☐ CNS13438

7.2 EMS Standards/EMS 标准

☒ EN55035

☐ EN55020

☐ EN55014-2

☐ EN61204-3

7.2.1 IEC 61000-4-2, electrostatic discharge(ESD) requirement/静电抗扰度要求

Discharge characteristic/静电规格	Test level/测试条件	Test criteria/测试标准
Air discharge/空气放电	+/-8KV	B
Contact discharge/接触放电	+/-4 KV	B

7.2.2 IEC 61000-4-4, electric fast transients(EFT) immunity requirement/电快速瞬变脉冲群

Coupling/测试端口	Test level/测试条件	Test criteria/测试标准
AC-input/交流输入	0.5KV	A
AC-input/交流输入	1KV	B

7.2.3 IEC 61000-4-5, surge capability requirement/浪涌抗扰度要求

Surge voltage/雷击电压	Test criteria/测试标准
Differential mode/差模 +/-1KV	A
Common mode/共模 +/-2KV	

7.2.4 Assessment criteria /评估标准

Acceptable criteria 可接受标准	Performance 性能
A	Performance is not allowed to be changed, any changes should be within the specified limits 性能不允许变化；如果性能会发生变化，则变化的范围在产品规格书规定的范围内。
B	During the testing process, the performance degradation is allowed within the specifications of the product specification. After the elimination, the equipment can return to normal and no reset or any manual intervention is allowed. . 设备在测试过程中，性能降低允许在产品规格书要求范围内，干扰消除后，设备能恢复正常，不允许出现复位和任何方式的人工干预。

8. Safety Standards/安规标准

8.1 Safety Accord with/安全:符合标准

- ☒ UL62368-1, CSA C22.2 NO. 62368-1 ☐ UL60065, CSA C22.2 NO. 60065
☐ UL1310
☒ IEC62368-1 ☐ IEC60065 ☐ IEC61558-1, IEC61558-2-16
☒ EN62368-1 ☐ EN60065 ☐ EN61558-1, EN61558-2-16
☒ AS/NZS 62368.1 ☐ AS/NZS 60065 ☐ AS/NZS 61558.1, AS/NZS 61558.2.16
☐ GB4943.1 ☐ GB8898
☐ J60950-1 ☐ J60065 ☐ J61558-1, J61558-2-16
☐ K60950-1 ☐ K60065
☐ CNS14336-1 ☐ CNS14408

Note: AC pins corresponding to relative national standards.

注：相应的 AC 插脚对应相应国家的标准。

8.2 Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary: **4242VDC** / **5mA**Max / 60second(3 seconds for mass production)

初级对次级: **4242VDC** / **5mA**Max / **60** 秒(生产时高压测试时间: **3** 秒)


8.3 Leakage Current/漏电流

0.25mAmax. at 264Vac / 50Hz / 在 **264Vac** / **50Hz** 输入时，最大漏电流 **0.25mA**


8.4 Insulation Resistance/绝缘阻抗

50MΩ min. at primary to secondary add 500Vdc test voltage
在初级与次级间加 500Vdc 进行测试,最小绝缘阻抗 50MΩ


9. Outline Drawing/外观示意图:

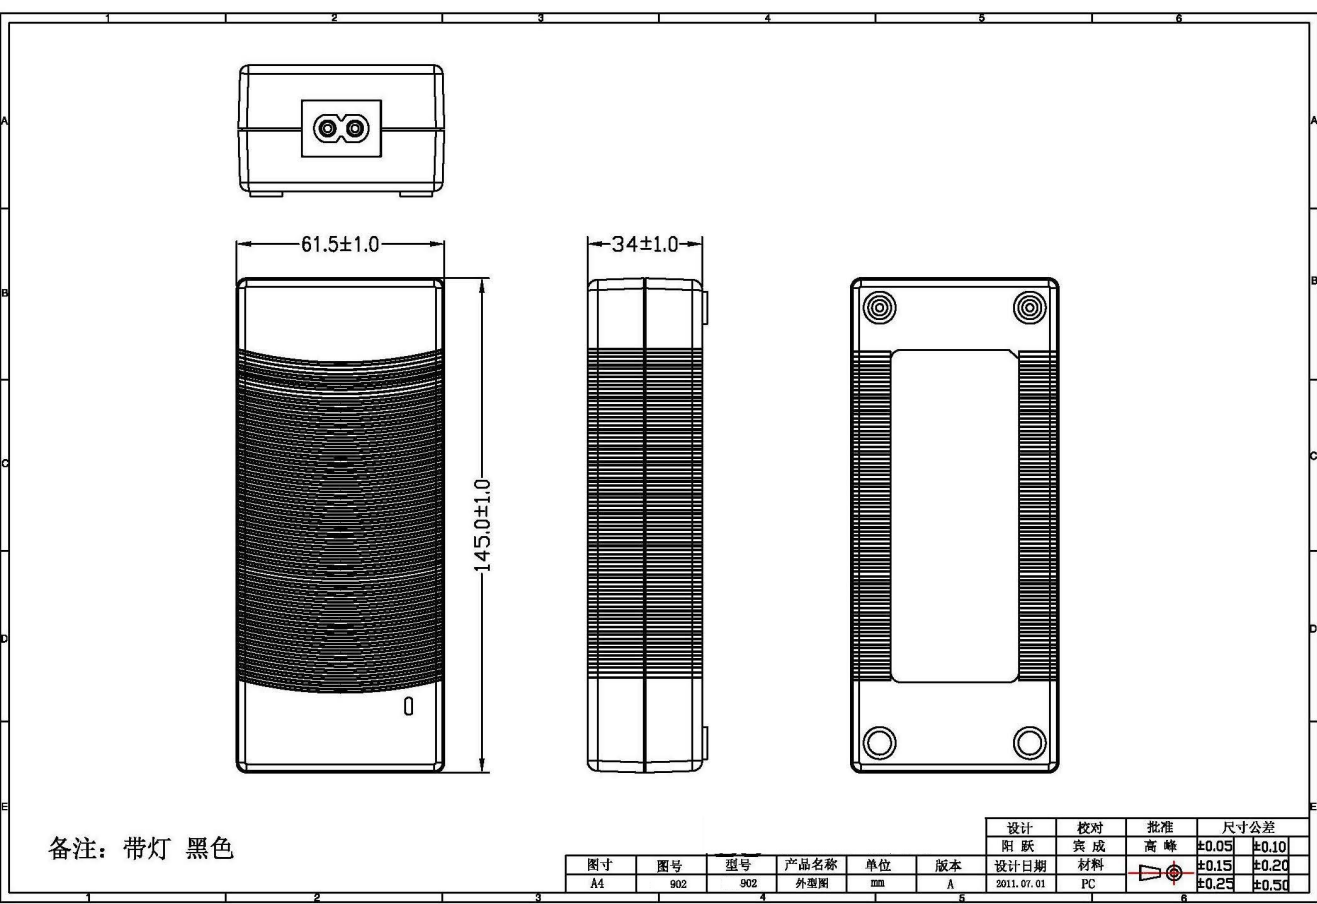


10. DC Cord Drawing/DC 线示意图:

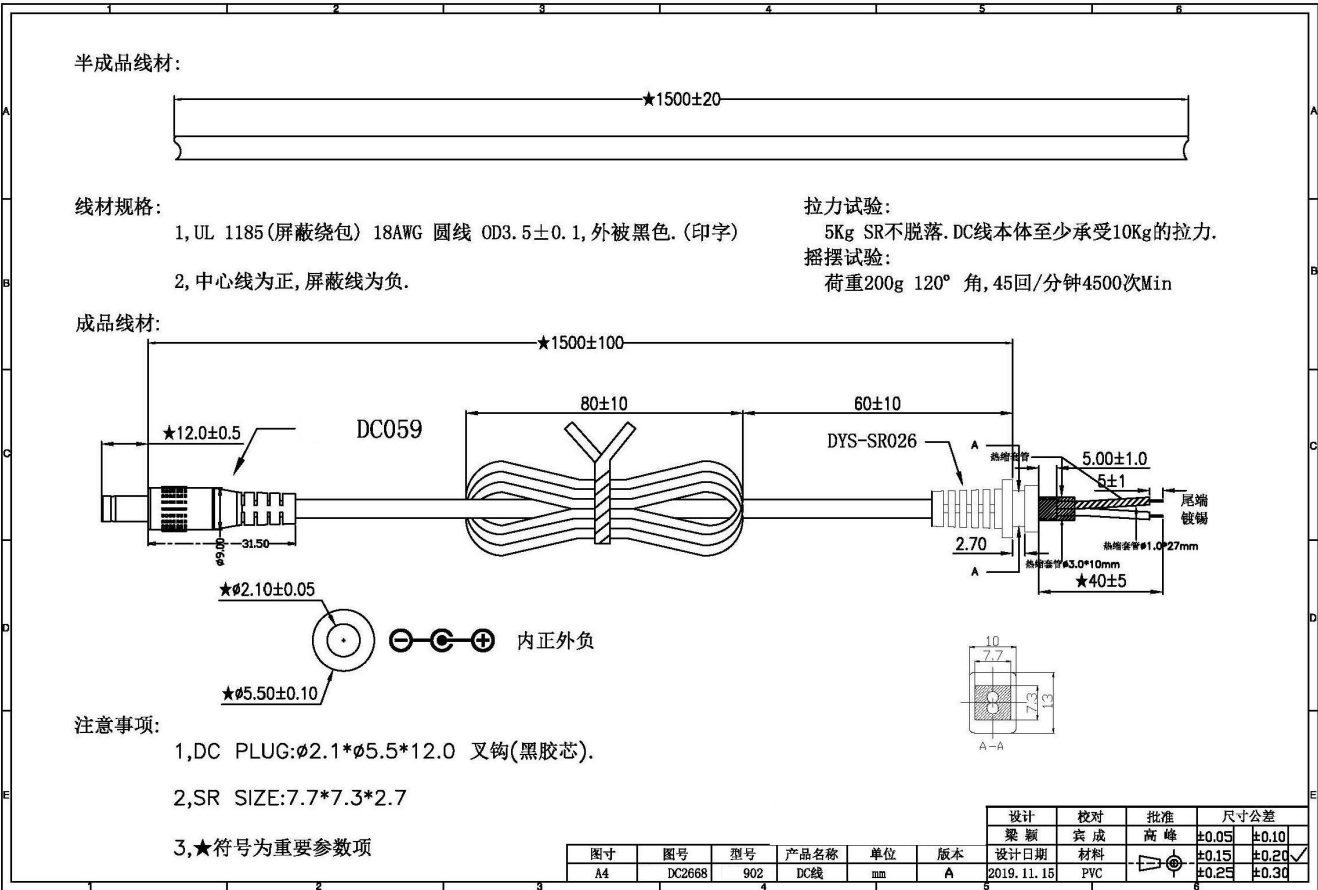

11. AC Cord Drawing/AC 线示意图:

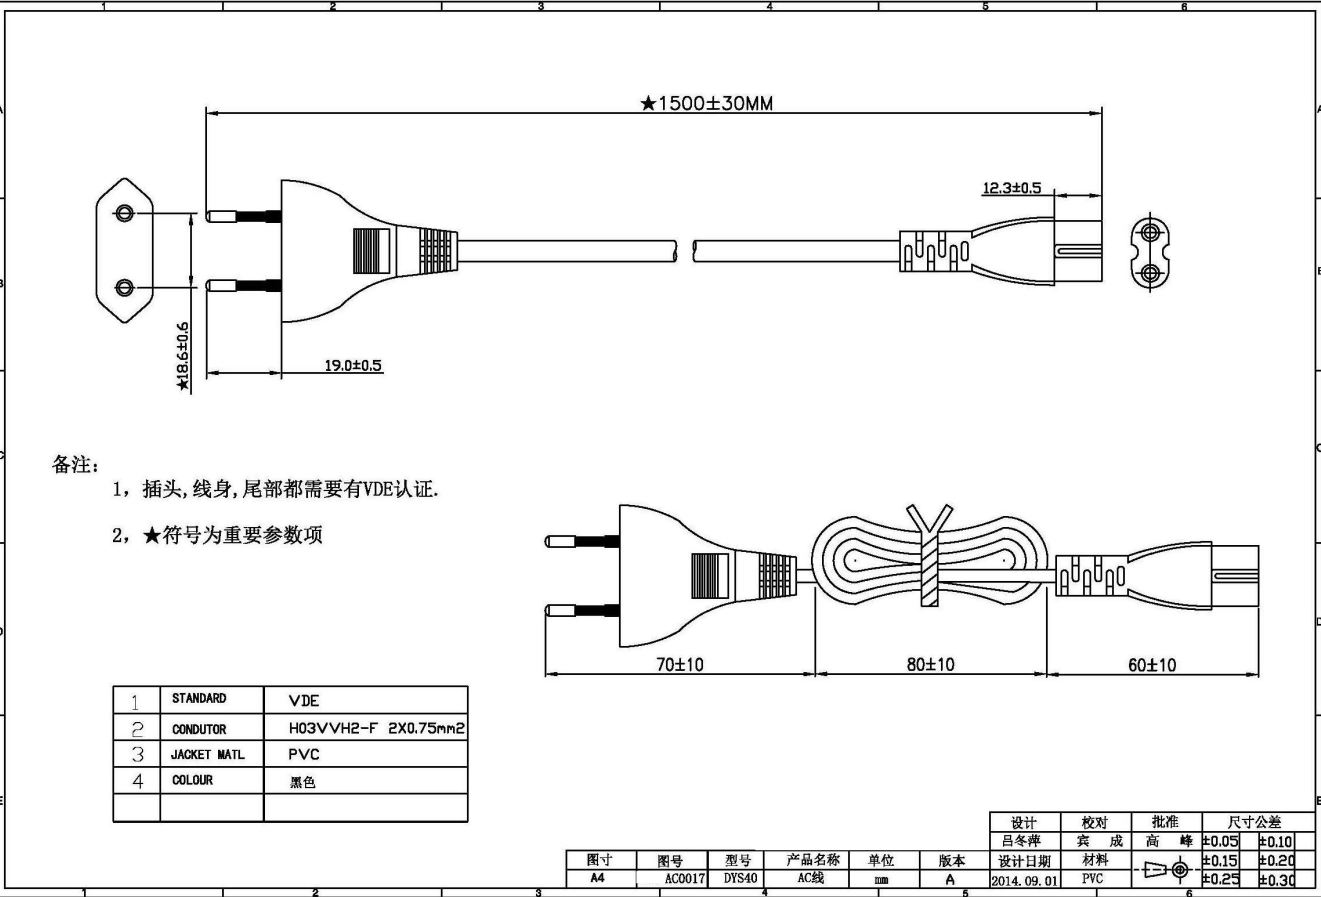

12. Marking Drawing/铭牌示意图:

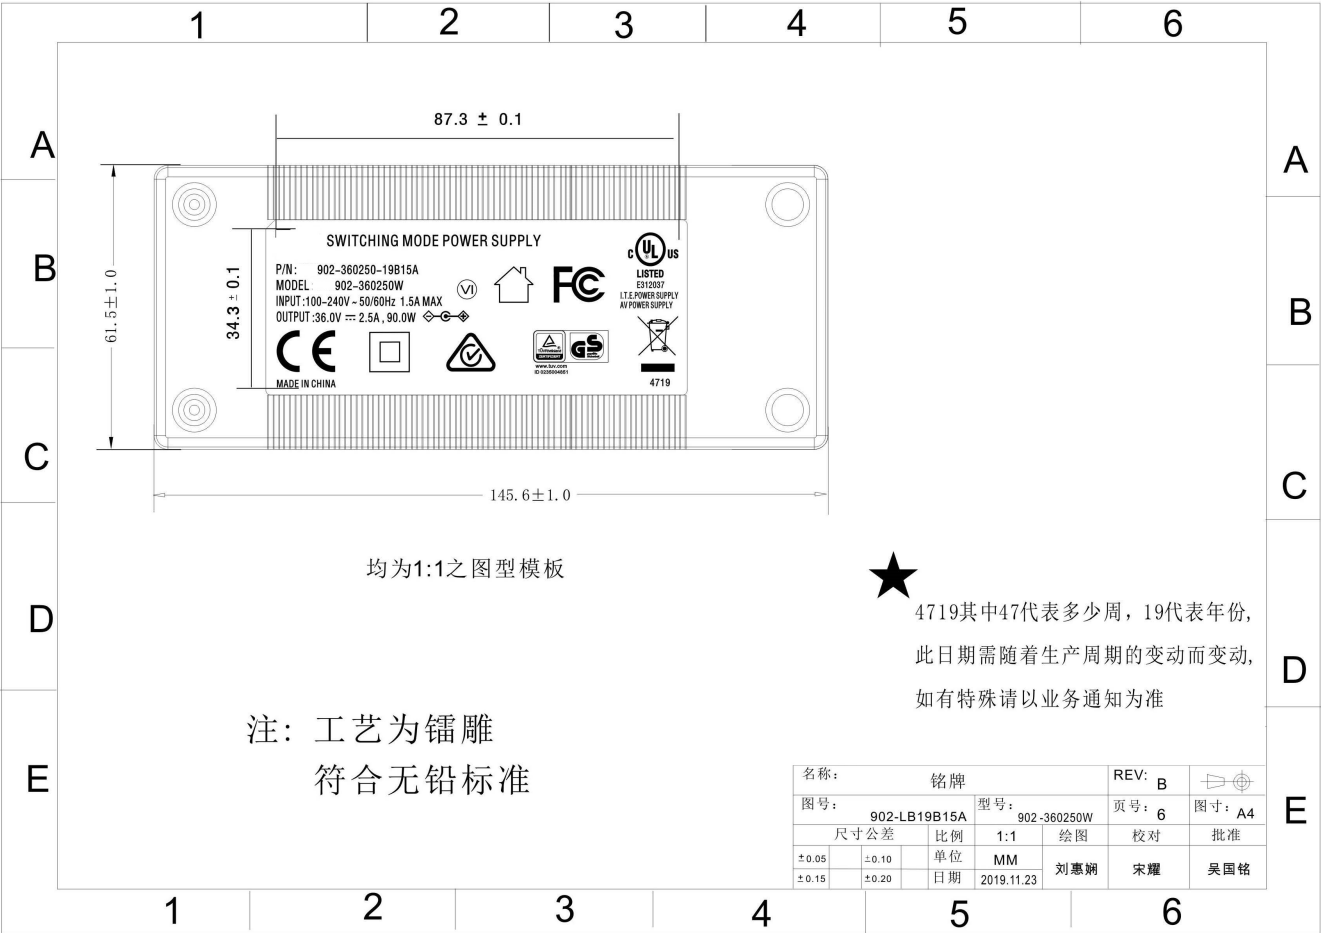

13. Package Drawing/包装示意图:

PLASTIC BAG/PE袋







WHITE BOX/白盒



CARDBOARD/纸板



PAPER CASE/纸箱



MECHANICAL DIMENSION:

	L(mm)	W(mm)	H(mm)
PLASTIC BAG	250	150	
WHITE BOX	175	100	75
CARDBOARD	430	360	
PAPER CASE	440	370	415

PACKING METHOD:

PACKING METHOD	8PCS/LAYER *5LAYERS
QTY	40PCS
N.W	17.5Kg
G.W	19.0Kg

14. Sample Test Report/样品测试报告:

Customer:01061			Product Name: Swithing Mode Power Supply				P/N:902-360250-19B15A			
Product Specification: AC100-240V 50/60Hz DC36.0V/2.5A						Safety: 桌上式				
Item No.	Testing Title		Test Result	Sample Number and Test Result						
	Items	Condition		1	2	3	4	5	PASS	
Basic Electrical Characteristics	1、No load voltage	AC90V/60Hz	DC 36.0 ± 1.8 V	36.28					PASS	
		AC180V/50Hz	DC 36.0 ± 1.8 V	36.28					PASS	
		AC264V/50Hz	DC 36.0 ± 1.8 V	36.28					PASS	
	2、Full Load voltage	AC90V/60Hz	DC 36.0 ± 1.8 V	35.75					PASS	
		AC180V/50Hz	DC 36.0 ± 1.8 V	35.75					PASS	
		AC264V/50Hz	DC 36.0 ± 1.8 V	35.75					PASS	
	3、Full Load input power	AC90V/60Hz	FULL LOAD (W)	100.92					PASS	
		AC180V/50Hz	FULL LOAD (W)	99.52					PASS	
		AC264V/50Hz	FULL LOAD (W)	98.78					PASS	
	4、Efficiency	AC115V/60Hz	≥ 88.0%(Average Of 25/50/75/100% Loads)	90.63					PASS	
		AC230V/50Hz	≥ 88.0%(Average Of 25/50/75/100% Loads)	91.42					PASS	
		AC115V/60Hz	/ (10% Loads)	91.72					PASS	
		AC230V/50Hz	/ (10% Loads)	91.44					PASS	
	5、Ripple & noise	AC90V/60Hz	≤200 mV(FULL LOAD)	140					PASS	
		AC180V/50Hz	≤200 mV(FULL LOAD)	130					PASS	
		AC264V/50Hz	≤200 mV(FULL LOAD)	130					PASS	
	6、Standby power		< 0.21 W	0.14					PASS	
	7、Short-circuit test	No output when short circuit happens work normally after recovery (100Vac)		0.43					PASS	
		No output when short circuit happens work normally after recovery (240Vac)		1.93					PASS	
	8、over-current		3.25 - 5.5 A (100Vac)	4.18					PASS	
	9、over-current		3.25 - 5.5 A (240Vac)	4.28					PASS	
	10、Noise test		40db MAX, 10CM	OK					PASS	
	11、Hi-pot test		DC4242V 60S<5mA	OK					PASS	
	12、Temperature rise		At normal temperature 25℃ , case surface temperature rise ≤55℃	OK					PASS	
	13、DC Cable size		Customer Request: 2.1*5.5*12.0 L=1.5M	2.1 * 5.5 * 12.0 L = 1.5M H					PASS	
Test status	1、High temperature		□ 60℃ ■80℃ ■48H □96H	OK				PASS		
	2、Low temperature		■-20℃ □-40℃ ■48H □96H	OK				PASS		
	3、Constant humidity		■ 40℃ 95%RH ■48H □96H	OK				PASS		
	4.Plugfest(male to female)		3000 times Min	OK				PASS		
	5、Burn-in test		≥8hours AC100/240V each 4H full load	OK				PASS		