

YS120 SERIES

Input: 100-265VAC 50/60Hz
Output Voltage: 5V-36V DC
Rated Power: 150W max



Features


Universal AC input/ Full range
 Energy efficiency level VI
 Leakage Current: < 0.25mA
 Extremely low leakage current
 Protection: Over load/Over voltage/Short circuit
 Withstand voltage : 3KV
 Life Warranty: 3 years

Application

Digital equipment
 Electric curtains
 Kitchen appliances
 Household appliances



■ Dimensions and Installation

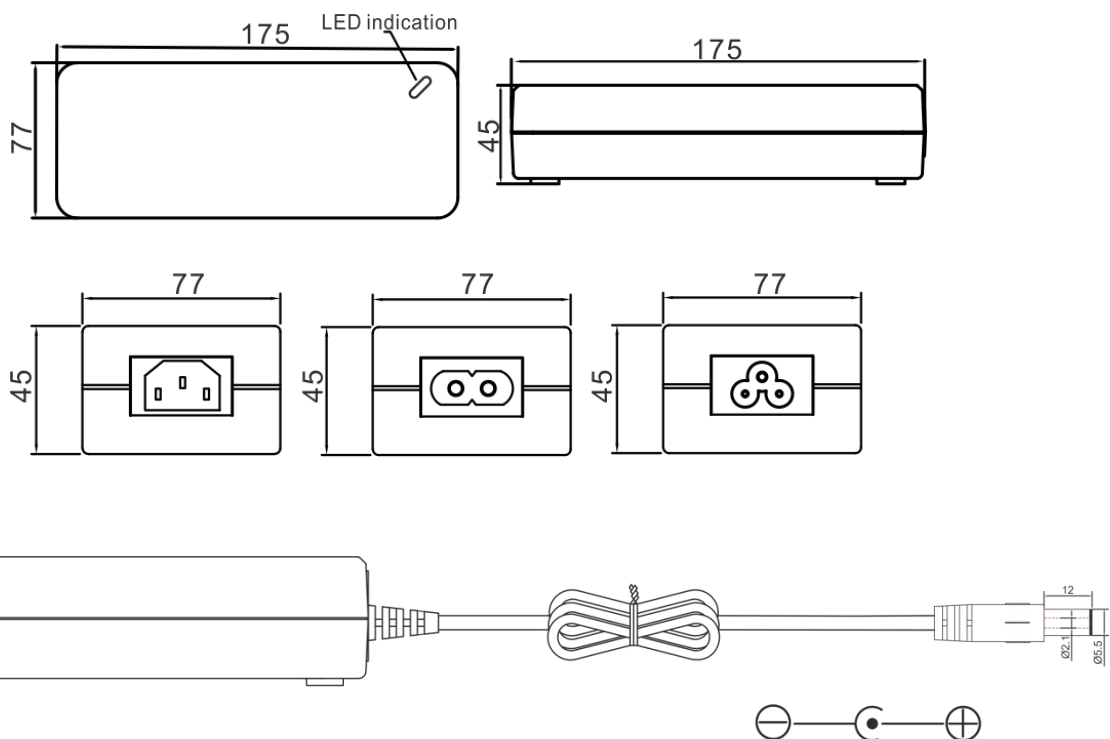


Switching Power Adapter

YS120 SERIES


MODEL DETAIL SPEC.		YS120-09015000	YS120-12012500	YS120-15010000	YS120-19007800	YS120-24006250	YS120-4803120
INPUT	Input Voltage:	85-265VAC					
	Input Frequency:	50/60Hz					
	Inrush Current:	40A/115VAC 60A/230VAC					
	AC Current:	1.5A max.					
	Leakage Current:	< 0.25mA/240VAC					
	Efficiency:	89%	89%	89%	89%	89%	89%
OUTPUT	DC Voltage:	9V	12V	15V	19V	24V	48V
	Rated Current:	15A	12.5A	10A	7.8A	6.25A	3.12A
	Rated Power:	135W	150W	150W	148.2W	150W	150W
	Voltage Tolerance:	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%	±5.0%
	Ripple and Noise:	100mVp-p	120mVp-p	150mVp-p	190mVp-p	240mVp-p	480mVp-p
	Line Regulation:	±3%					
	Load Regulation:	±5%	±5%	±5%	±5%	±5%	±5%
	Setup, Rise, Hold Up time:	500ms, 30ms/120ms 230VAC 1000ms, 30ms/25ms 115VAC at full load					
ENVIRONMENTAL	Operating Temperature:	-20 ~ +60 (Refer to "Derating Curve")					
	Storage Temp:	-40°C ~ 85°C					
	Storage Humidity:	10 ~ 95% RH					
	Working Humidity:	20 ~ 95% RH non-condensing					
PROTECTION	Over Load:	Above 105% rated output power					
		Protection type: Hiccup mode, recovers automatically after fault condition is removed					
	Over Voltage:	≤Vout*150%					
		Protection type: Shut down o/p voltage, re-power on to recover					
Over Temperature:	When the NTC resistance temperature is between 85°C and 100°C ,The power supply shall be protected and no deformation and no discoloration on case						
SAFETY & EMC	Safety Regulations:	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, BSMI CNS14336-1, AS/NZS 62368.1 approved					
	Withstand Voltage:	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC					
	Isolation Resistance:	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH					
	EMC Emission:	Compliance to BS EN/EN55032 (CISPR32), BS EN/EN61204-3 Class B, BS EN/EN61000-3-2,-3, EAC TP TC 020, CNS13438 Class B					
	EMC Immunity:	EN/EN61000-4-2,3,4,5,6,8,11					
OTHER	MTBF:	500Khrs min. MIL-HDBK-217F(25°C)					
	Size:	172*72.5*42.5mm					
	Weight:	590g / pcs					
	Packaging:	20PCS/CTN					

YS120 SERIES

Deduction curve and temperature

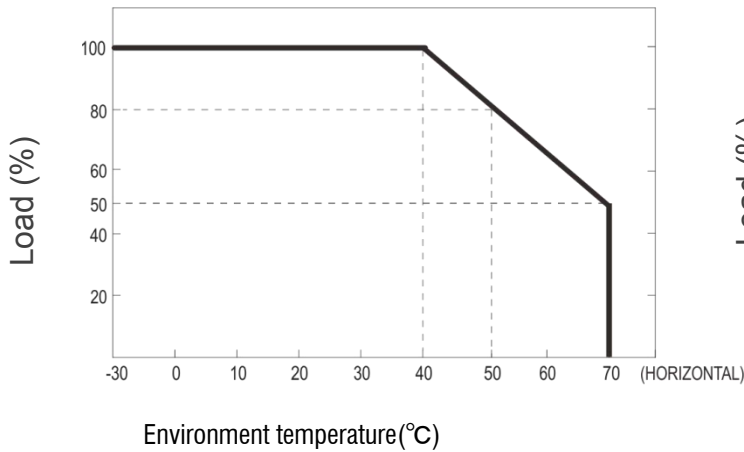

Minus output and input voltage curves

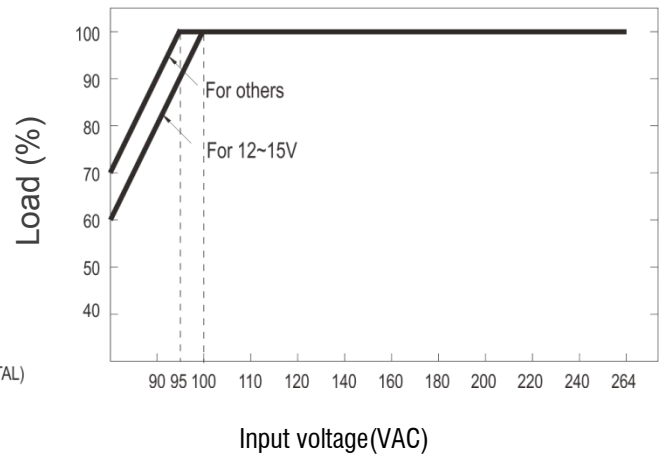

Functional Diagram

Standard plug: P1J

P1J			Pin Assignment
			Outside Inside -V not connected to AC FG(standard) -V connected to AC FG(optional)

DC plug changeable through:











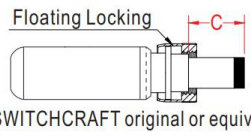






- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
 - (2) Quick adapter accessory (sold separately without MOQ)
- Please refer to below table and online selection guide :

Example quick adapter accessory:

Switching Power Adapter
















YS120 SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   (Straight)	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)		
	P1L	5.5	2.5	9.5			
	P1M	5.5	2.1	11.0			
	 (Right-angled)	P1IR	5.5	2.5		9.5	
		P1JR	5.5	2.1		11.0	
		P1LR	5.5	2.5		9.5	
		P1MR	5.5	2.5		11.0	
Barrel Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   (Straight)	P2I	5.5	2.1	9.5	None		
	P2J	5.5	2.1	11.0			
	P2L	5.5	2.5	9.5			
	P2M	5.5	2.1	11.0			
	 (Right-angled)	P2IR	5.5	2.5		9.5	
		P2JR	5.5	2.1		11.0	
		P2LR	5.5	2.5		9.5	
P2MR		5.5	2.5	11.0			
Lock Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   Floating Locking SWITCHCRAFT original or equivalent	P2S(S761K)	5.53	2.03	12.06	None		
	P2K(761K)	5.53	2.54	12.06			
	P2C(S760K)	5.53	2.03	9.52			
	P2D(760K)	5.53	2.54	9.52			
Center Pin Style		Type No.	A	B	C	D	Quick Adapter Accessory
			OD	ID	L	Center Pin	
   EIAJ equivalent	P4A	5.5	3.4	11.0	1.0	Available (Current rating: 7.5A max.)	
	P4B	6.5	4.4	11.0	1.4		
	P4C	7.4	5.1	11.0	0.6		
Min. Pin Style		Type No.	A	B	C	Quick Adapter Accessory	
			OD	ID	L		
   EIAJ equivalent	P3A	2.35	0.7	11.0	Available (Current rating: 5A max.)		
	P3B	4.0	1.7	11.0			
	P3C	4.75	1.7	11.0			

YS120 SERIES

Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style	Type No.	Pin Assignment		Quick Adapter Accessory
		PIN No.	Output	
   <p>KYCON KPPX-3P equivalent</p>	R6B	1	+Vo	Available (Current rating: 7.5A max.)
		2	-Vo	
		3	+Vo	
Barrel Style	Type No.	Pin Assignment		Available (Current rating: 7.5A max.)
   <p>KYCON KPPX-4P equivalent</p>	R7B	PIN No.	Output	
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
Lock Style	Type No.	Pin Assignment		None
   <p>KYCON KPJX-CM-4S equivalent</p>	R7BF	PIN No.	Output	
		1	+Vo	
		2	-Vo	
		3	-Vo	
		4	+Vo	
Center Pin Style	Type No.	Pin Assignment		Available (Current rating: 7.5A max.)
  	R1B	PIN No.	Output	
		1	-Vo	
		2	-Vo	
		3	+Vo	
		4	-Vo	
		5	+Vo	
Center Pin Style	Type No.	Pin Assignment		None
  	by customer	PIN No.	Output	
		1	+Vo	
		2	-Vo	